

# MAXHUB CMA-T Series

An exceptional display with high brightness and 24/7 continuous operation, the perfect choice for a wide range of commercial environments.



**4K** Crystal-clear detail, anywhere

**24/7** Operation, reliable display performance

**Stable** and multifunctional design for business

**Effortlessly** manage and distribute content

## Crystal-Clear Detail, anywhere

The combination of 4K UHD resolution and high brightness ensures true-to-life detail.



**Salty Environment**

**Humid Environment**

**With Conformal Coating**

**Without Conformal Coating**

Conformal coating reduces the risk of damage from salt, dust, and humidity, ensuring stable device performance.



## Stable and Multifunctional Design for Business




(800 nits)

Incorporating a remarkable 4K UHD resolution alongside an impressive brightness level of 800 nits, the product ensures exceptionally vibrant and lifelike content presentation, capturing the public's attention effortlessly.




The full-function USB Type-C supports ScreenShare, making content sharing easy. NetworkShare allows for effortless network sharing, and the 65W power output enables connected PC charging that is faster than a typical charger.

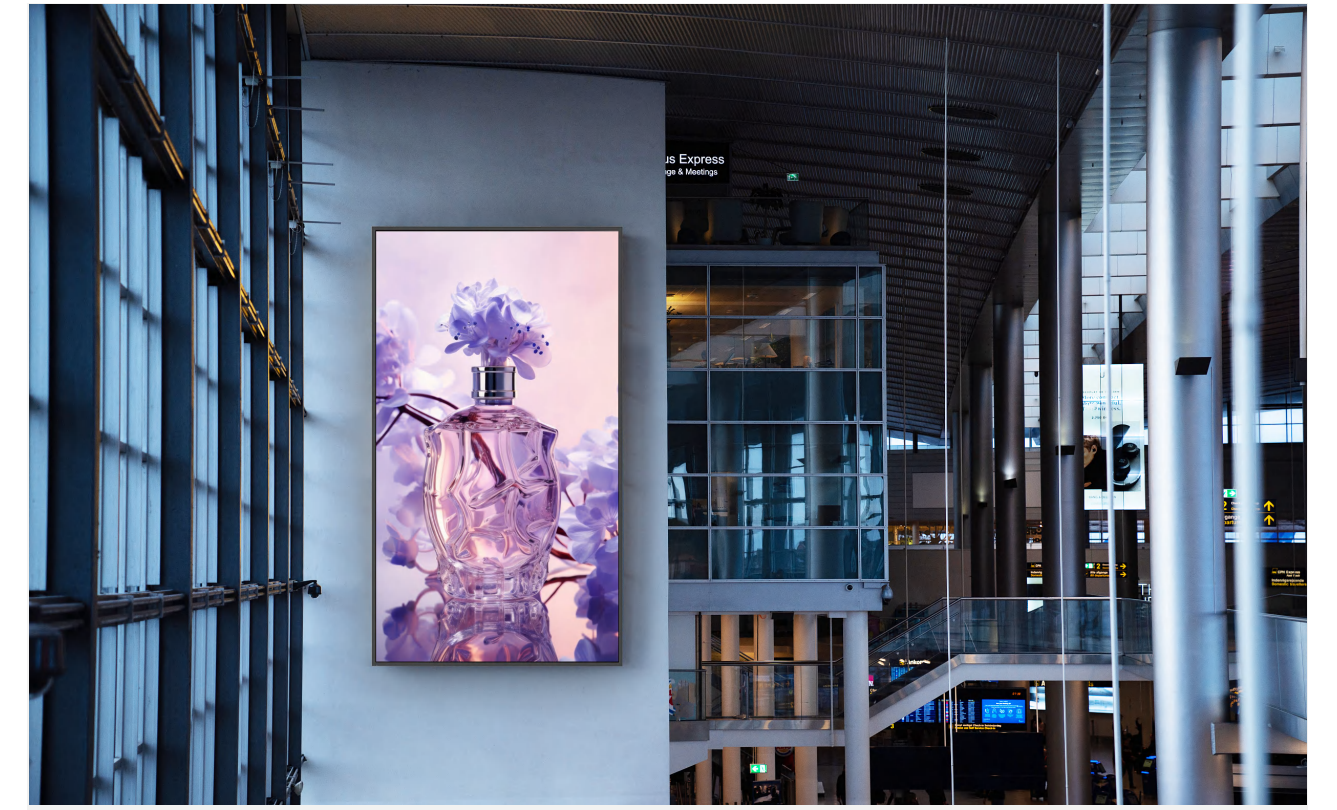

Consistent and stable performance throughout 24 hours of continuous operation. This feature makes it exceptionally well-suited for uninterrupted commercial usage, ensuring reliability in demanding environments.

## Effortlessly Manage and Distribute Content

MAXHUB Pivot is a device management tool that enables IT administrators to efficiently manage devices and remotely distribute content.

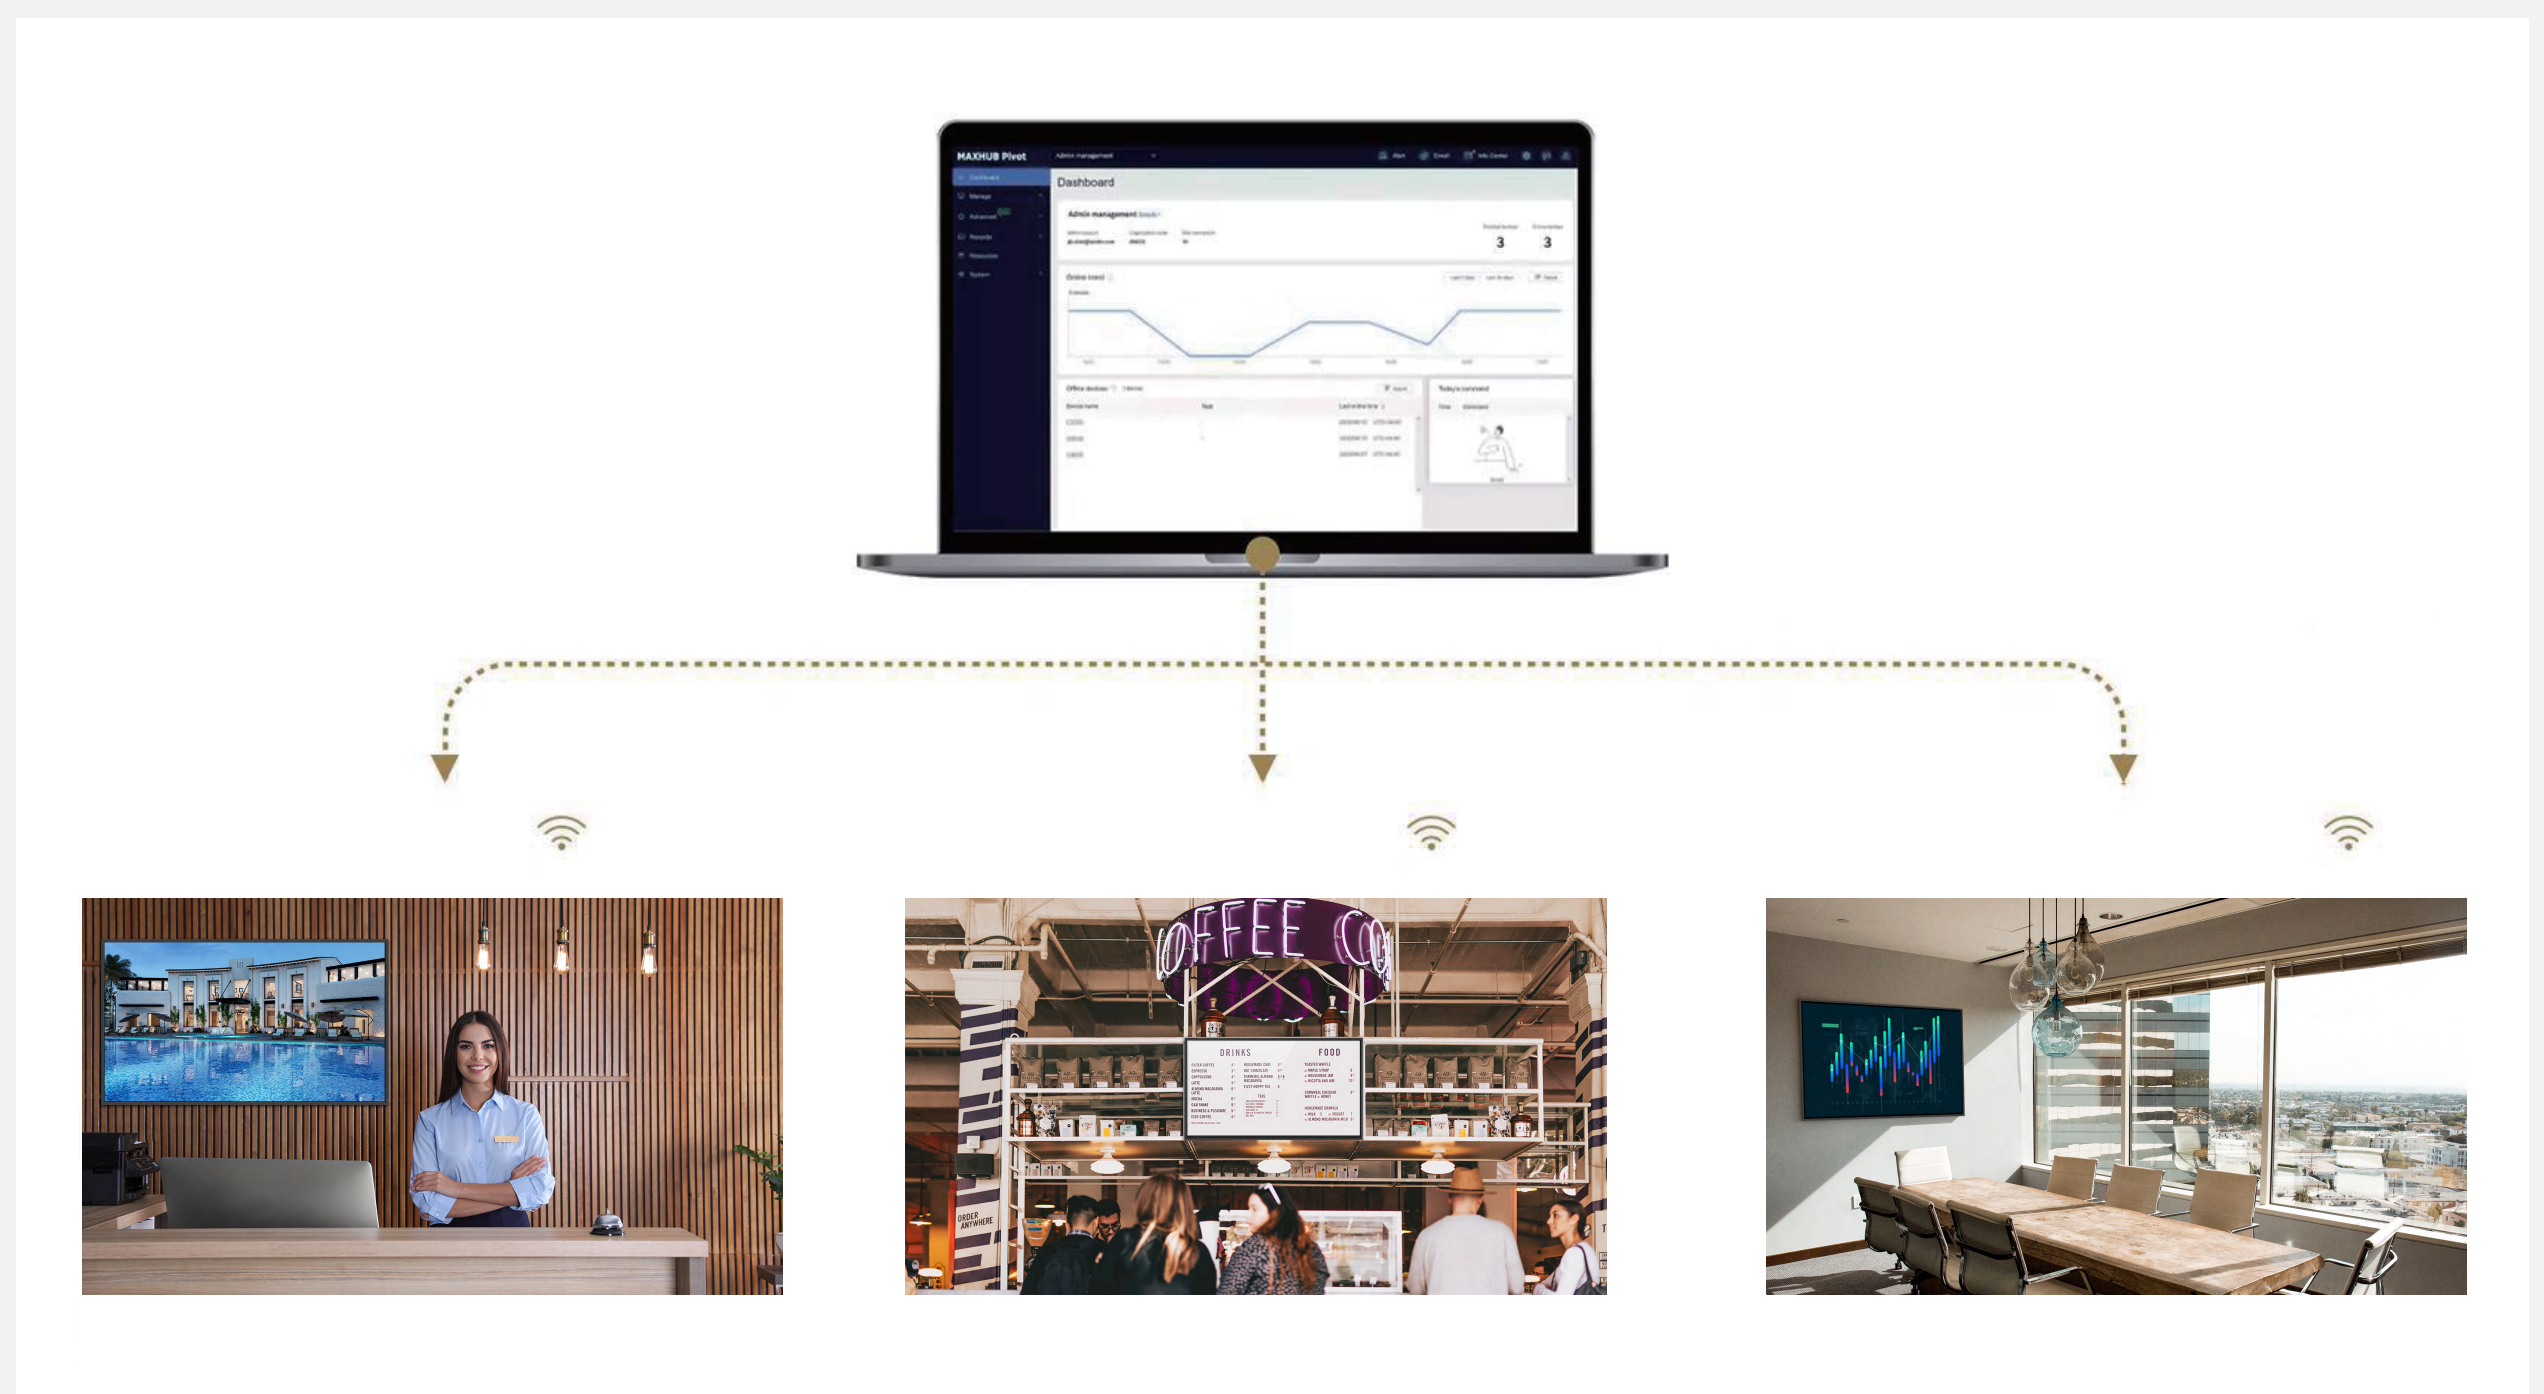

## Specification

Model	ND55CMA-T	ND65CMA-T	ND75CMA-T
Screen Size	55"	65"	75"
Screen Type	VA	VA	VA
Brightness	800 nits	800 nits	800 nits
Contrast Ratio	6,000:1 (Typ) 1,000,000:1 (Dynamic)	6,000:1 (Typ) 1,000,000:1 (Dynamic)	6,000:1 (Typ) 1,000,000:1 (Dynamic)
Resolution	4K UHD	4K UHD	4K UHD
Viewing Angle	178°(H/V)	178°(H/V)	178°(H/V)
Operating System	MAXHUB Signage OS	MAXHUB Signage OS	MAXHUB Signage OS
OPS Capable	No	Yes	Yes
Wifi Module	SI07B	SI07B	SI07B
Speakers	2 × 16W	2 × 16W	2 × 16W
Thickness of Bezel	9.9mm	15.9mm	15.9mm
Portrait/Landscape Mode	Yes	Yes	Yes
Wall Mounting Mode	WIB4722A	WIB9080A	WIB9080A
Operation Hours	24/7	24/7	24/7
Life Time	≥50000 hours	≥50000 hours	≥50000 hours
N.W(kg)	13.40 kg 29.54 pounds	25.40 kg 56.0 pounds	34.65 kg 76.40 pounds