



PROJECTOR

**LSC520WU**


## Key Features

- 5,200 ANSI Lumens offering bright images in any environment
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Supports a 21:9 aspect ratio, ideal for Microsoft Teams Rooms
- Installation flexibility: V lens shift, 1.6x optical zoom, and H/V keystone correction
- 3rd generation laser phosphor technology with a lifespan up to 30,000 hours



## Product Description

The LSC520WU is a lamp-free, high-brightness projector designed for commercial, educational, and public spaces. Utilizing 3rd generation laser phosphor technology, this projector delivers 5,200 ANSI Lumens of brightness for up to 30,000 hours and can project an ultra-large screen up to 300" in WUXGA resolution. Ideal for modern workplaces, its 21:9 aspect ratio is optimized for Microsoft Teams Rooms applications, enhancing collaborative environments. Equipped with features like V lens shift, 1.6x optical zoom, H/V keystone correction, and 360° projection capabilities, the LSC520WU offers flexible setup possibilities. Additionally, its comprehensive LAN control ensures seamless integration into existing device management networks.

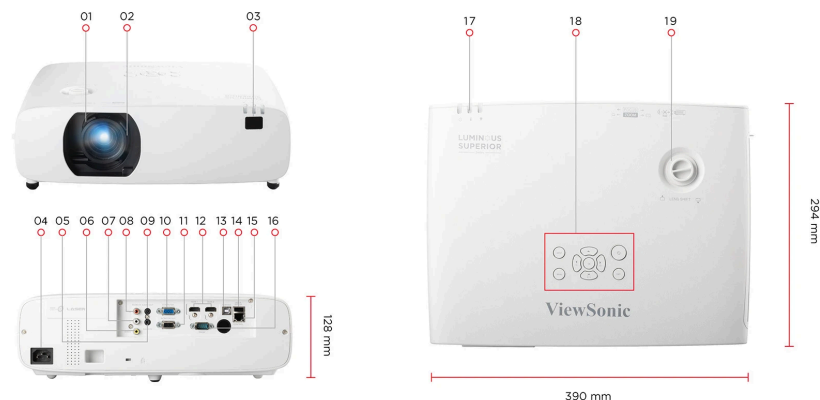

SPECIFICATION		1. Zoom Ring 2. Focus Ring	8. Audio In (R) 9. Audio Out	OTHERS	15. RJ45 16. RS232
Native Resolution:	1920x1200			Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Brightness:	5200 (ANSI Lumens)			Power Consumption:	Normal: 230W Standby: <0.5W
Brightness (Center Lumens):	6000			Operating Temperature:	0~40°C
Contrast Ratio:	3000000:1			Carton:	Brown
Display Color:	1.07 Billion Colors			Net Weight:	5.2kg
Light Source Type:	Laser Phosphor			Gross Weight:	7.23kg
Light Source Life (hours) with Normal Mode:	20000			Dimensions (WxDxH) with Adjustment Foot:	390x294x128mm
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)			Packing Dimensions:	492x443x239mm
Lens:	F=1.58-2.02, f=15.3-24.6mm			OSD Language:	English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portuguese, Japanese, Simplified Chinese, Traditional Chinese, Korean, Russian, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi, total 25 languages
Projection Offset:	0%+/-5%			User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages
Throw Ratio:	1.08-1.76			STANDARD ACCESSORY	
Optical Zoom:	1.6X			Power Cord:	1
Digital Zoom:	1.0x-4.0x			Remote Control:	1
Image Size:	30"-300"			QSG:	Yes
Throw Distance:	0.70-11.37m (100"@2.33m)			Air Filter:	Yes
Keystone:	H:+/-30°, V:+/-30°			Warranty Card:	Yes (CN Only)
Lens Shift V. Range:	+45%, 0%			OPTIONAL ACCESSORY	
Audible Noise (Normal):	35dB			Air Filter:	Yes
Audible Noise (Eco):	26dB			Wall/Ceiling Mount:	PJ-WMK-007
Input Lag:	60ms				
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@30Hz)				
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p@30Hz				
Horizontal Frequency:	15K-100KHz				
Vertical Scan Rate:	23-85Hz				
<b>INPUT</b>					
Computer in (share with component):	1				
Composite:	1				
HDMI:	2 (HDMI 1.4/ HDCP 1.4)				
Audio-in (3.5mm):	1				
Audio-in (RCA R/L):	1				
USB Type A:	1 (5V/1.5A)				
<b>OUTPUT</b>					
Monitor out:	1				
Audio-out (3.5mm):	1				
Speaker:	16W				
USB Type A (Power):	1 (USB2.0 - 5V/1.5A, share with USB A Input)				
<b>CONTROL</b>					
RS232 (DB 9-pin male):	1				
RJ45 (LAN control):	1				
USB Type B (Services):	1				

